



edge of electrical engineering

# LED Lighting Catalogue



edge of electrical engineering

### **ABOUT US :**

*LS POWER CONTROL is a company with mission to provide products that are designed to meet the varieties of requirements of our valued customers with most energy efficient lighting solution options. We continuously strive to provide our valued channel partners as well as end users with new ideas technically engineered and designed into sturdy products to align with our vision. We are a team of highly qualified and professional people who after serving various industries into different functions such as retail, finance, manufacturing, robotics, artificial intelligence and technical, have ventured as a unit into developing the most advanced lighting products and technically driven solutions.*

*We also have an independent wing of young and dynamic professionals in our R&D team to minutely examine, design and provide products that are highly durable, pocket- friendly and eco-friendly. We at LS POWER CONTROL. once again wish our existing as well as future customers for encouraging us to develop latest and enhanced quality products through regular interactions and feedback.*

### **VISION :**

*Our vision is to provide a one stop lighting solution to our customers with a variety of LED lighting products basket under one flagship brand. We want to build and widen our customer base where our users recognise our LED lighting as a symbol of trust of quality, superiority, affordability, user friendly and environment friendly lighting solutions.*

### **MISSION :**

*Our mission as a company is to provide our end users with LED lighting products which are technically advanced and asthetically designed. We want to build a strong bond of trust amongst our channel partners through a transparent and flawless business model.*



edge of electrical engineering

### LED LW BULB - PLUTO LED LW BULB - PLUTO DELUXE

POWER	LUMEN OUTPUT	CRI	BEAM ANGLE	OD (mm)	HEIGHT (mm)	STD PKG
7W	700 lm	>80	180°	57	100	50
9W	900 lm	>80	180°	57	100	50
12W	1200 lm	>80	180°	65	125	50
15W	1500 lm	>80	180°	65	125	50

\* AVAILABLE IN B22 AND E27 BASE. COLOUR TEMP: 6K & 3K

Application: Residential | Table Lamp | Wall Light | Hotels

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- IP Rating: IP20
- Color Rendering Index > 80
- Energy efficient and durable half dome bulb
- Luminous Efficacy of >100lm/W
- Surge protection up to 3kV

\*\* Not suitable for Enclosed Fixtures & Outdoors



PLUTO DELUXE



PLUTO



**PLUTO - R**



**PLUTO - R DELUXE**

**LED RECHARGEABLE BULB - PLUTO - R**  
**LED RECHARGEABLE BULB - PLUTO - R DELUXE**

POWER	LUMEN OUTPUT	CRI	BEAM ANGLE	OD (mm)	HEIGHT (mm)	STD PKG
9W	900 lm	>80	270°	65	125	50

\* AVAILABLE IN B22 AND E27 BASE. COLOUR TEMP: 6K & 3K

**Application: Residential | Remote Area | Indoor Parking**

- Input Voltage: 220-240 AC
  - Power Factor : >0.9
  - Operating Temperature: -20°C to 50°C
  - Frequency: 50-60Hz
  - Powered by Lithium-ion Battery of 2000mah
  - IP Rating: IP20
  - Color Rendering Index > 80
  - Excellent power backup of up to 4 Hrs.
  - Luminous Efficacy of >100lm/W
  - Surge protection up to 3kV
- \*\* Not suitable for Enclosed Fixtures & Outdoors



edge of electrical engineering

### LED DECO BULB - NIGHTO

POWER	LUMEN OUTPUT	CRI	BEAM ANGLE	OD (mm)	HEIGHT (mm)	STD PKG
0.5W	50 lm	>70	270°	65	75	50

\* AVAILABLE IN B22 BASE. COLOUR: WHITE, YELLOW, RED, GREEN, ORANGE, BLUE

Application: Night Lamp | Washroom | Indicator Points



- Input Voltage: 220-240 AC
  - Power Factor : >0.9
  - Operating Temperature: -20°C to 50°C
  - Frequency: 50-60Hz
  - IP Rating: IP20
  - Color Rendering Index > 80
  - Luminous Efficacy of >100lm/W
  - Surge protection up to 3kV
- \*\* Not suitable for Enclosed Fixtures & Outdoors



edge of electrical engineering

### LED HIGH WATTAGE BULB - ROCK LED HIGH WATTAGE BULB - ROCK DELUXE

POWER	LUMEN OUTPUT	CRI	BEAM ANGLE	OD (mm)	HEIGHT (mm)	STD PKG
30W	3000 lm	>80	260°	90	180	10
40W	4000 lm	>80	260°	100	180	10
50W	5000 lm	>80	260°	120	208	10

\* AVAILABLE IN B22 AND E27 BASE. COLOUR TEMP: 6K & 3K

Application: Residential | Retail | Warehouse | Industrial Area

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- Color Rendering Index > 80
- IP Rating: IP20
- Anti-dust skiing slope design of the heat sink fins
- High quality diffuser for glare free distribution
- Luminous Efficacy of>100lm/W
- Surge protection up to 3kV

\*\* Not suitable for Enclosed Fixtures & Outdoors



ROCK DELUXE



ROCK



### LED PC T5 BATTEN - AIRO



POWER	LUMEN OUTPUT	CRI	LENGTH(mm)	WIDTH (mm)	HEIGHT (mm)	STD PKG
5W	500 lm	>80	285	22	38	25
10W	1000 lm	>80	610	22	38	25
18W	1900 lm	>80	1000	22	38	25
20W	2100 lm	>80	1132	22	38	25

\* AVAILABLE IN COLOUR TEMP: 6K & 3K

**Application:** Home | Office | Retail | School/Libraries | Indoor parking

- Input Voltage: 220-240 AC
  - Power Factor : >0.9
  - Operating Temperature: -20°C to 50°C
  - Frequency: 50-60Hz
  - Color Rendering Index > 80
  - IP Rating: IP20
  - Aesthetic sleek square shape design
  - High quality diffuser for glare free distribution
  - Luminous Efficacy of >100lm/W
  - Surge protection up to 3kV
- \*\* Not suitable for Enclosed Fixtures & Outdoors



edge of electrical engineering

### LED BLAZE BATTEN - T8



POWER	LUMEN OUTPUT	CRI	LENGTH(mm)	WIDTH (mm)	HEIGHT (mm)	STD PKG
5W	500 lm	>80	285	22	38	25
10W	1000 lm	>80	610	22	38	25
18W	1900 lm	>80	1000	22	38	25
20W	2100 lm	>80	1132	22	38	25

\* AVAILABLE IN COLOUR TEMP: 6K & 3K

Application: Home | Office | Retail | School/Libraries | Indoor parking

- Input Voltage: 220-240 AC
  - Power Factor : >0.9
  - Operating Temperature: -20°C to 50°C
  - Frequency: 50-60Hz
  - Color Rendering Index > 80
  - IP Rating: IP20
  - Aesthetic sleek square shape design
  - High quality diffuser for glare free distribution
  - Luminous Efficacy of >100lm/W
  - Surge protection up to 3kV
- \*\* Not suitable for Enclosed Fixtures & Outdoors





### LED PC DOWNLIGHTER - VEGI

ITEM DESCRIPTION	POWER	LUMEN OUTPUT	CRI	BEAM ANGLE	DIMENSION (mm)			STD PKG
					H	OD	CO	
VEGI – PC1	6W	540 lm	>80	120°	50	115	80	50
VEGI – PC2	6W	540 lm	>80	120°	50	115	80	50

\* AVAILABLE IN COLOUR TEMP: 6K & 3K. SUITABLE FOR 3INCH JUNCTION BOX

Application: Home | Office | Retail | Hospitality

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- Color Rendering Index > 80
- IP Rating: IP20
- Aesthetic compact round shape design
- High transmittance milky diffuser for uniform light distribution
- Luminous Efficacy of >90lm/W
- Surge protection up to 3kV
- \*\* Not suitable for Outdoors



edge of electrical engineering

### LED AL DOWNLIGHTER - VEGI ALR

ITEM DESCRIPTION	POWER	LUMEN OUTPUT	CRI	BEAM ANGLE	DIMENSION (mm)			STD PKG
					H	OD	CO	
VEGI - ALR	6W	540 lm	>80	120°	50	115	30	50
VEGI - ALR	9W	810 lm	>80	120°	50	115	30	50

\* AVAILABLE IN COLOUR TEMP: 6K, 3K, 3 IN 1, RGV, RED, BLUE, GREEN, PINK. SUITABLE FOR 3 INCH JUNCTION BOX

Application: Home | Office | Retail | Hospitality

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- Color Rendering Index > 80
- IP Rating: IP20
- Uniquely designed Al housing round shape fixture with silver color rings
- High transmittance milky diffuser for uniform light distribution
- Luminous Efficacy of >90lm/W
- Surge protection up to 3kV
- \*\* Not suitable for Outdoors





### LED AL DIECAST DOWNLIGHTER - VARNI

ITEM DESCRIPTION	POWER	LUMEN OUTPUT	CRI	BEAM ANGLE	DIMENSION (mm) H   OD   CO	STD PKG
VARNI RG	5W	540 lm	>80	120°	50   115   80	50
VARNI RG	9W	810 lm	>80	120°	50   115   80	50

\* AVAILABLE IN COLOUR TEMP: 6K, 3K, 3 IN 1, RGV, RED, BLUE, GREEN, PINK. SUITABLE FOR 3 INCH JUNCTION BOX

Application: Home | Office | Retail | Hospitality

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- Color Rendering Index > 80
- IP Rating: IP20
- Sturdy die cast Al housing round shape fixture
- High transmittance milky diffuser for uniform light distribution
- Luminous Efficacy of >90lm/W
- Surge protection up to 3kV
- \*\* Not suitable for Outdoors





### LED DEEP JUNCTION DOWNLIGHTER - VEGI MINI



POWER	LUMEN OUTPUT	CRI	BEAM ANGLE	DIMENSION (mm) H   OD   CO	STD PKG
3W	240 lm	>80	120°	50   82   50	50
5W	400 lm	>80	120°	50   82   50	50

\* AVAILABLE IN COLOUR TEMP: 6K, 3K, 3 IN 1, RGV, RED, BLUE, GREEN, PINK. SUITABLE FOR 2 INCH JUNCTION BOX

**Application: Home | Office | Retail | Hospitality**

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- Color Rendering Index > 80
- IP Rating: IP20
- Aesthetic compact round shape design
- High transmittance milky diffuser for uniform light distribution
- Luminous Efficacy of >80lm/W
- Surge protection up to 3kV
- \*\* Not suitable for Outdoors

### LED DEEP JUNCTION SURFACE - VEGI SURFO



POWER	LUMEN OUTPUT	CRI	BEAM ANGLE	DIMENSION (mm) H   OD   CO	STD PKG
6W	510 lm	>80	260°	50   90   50	50
10W	850 lm	>80	260°	50   120   50	50

\* AVAILABLE IN COLOUR TEMP: 6K, 3K, RED, BLUE, GREEN, PINK. SUITABLE FOR 2 INCH JUNCTION BOX

Application: Home | Office | Retail | Hospitality

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- Color Rendering Index > 80
- IP Rating: IP20
- Aesthetic compact round shape design
- High transmittance milky diffuser for uniform light distribution
- Luminous Efficacy of >85lm/W
- Surge protection up to 3kV
- \*\* Not suitable for Outdoors



edge of electrical engineering

### LED PC BACKLIT RECESS PANEL - BRIM

POWER	LUMEN OUTPUT	CRI	BEAM ANGLE	DIMENSION (mm) H   OD   CO	STD PKG
6W	540 lm	>80	120°	27   99   73	20
9W	810 lm	>80	120°	27   99   105	20
12W	1080 lm	>80	120°	27   130   105	20
18W	1620 lm	>80	120°	27   162   137	20

\* AVAILABLE IN COLOUR TEMP: 6K, 4K & 3K. AVAILABLE SHAPE: ROUND | SQUARE

Application: Home | Office | Retail | Hospitality

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- Color Rendering Index > 80
- IP Rating: IP20
- Aesthetic sleek design with back lit technology
- High transmittance milky diffuser for uniform light distribution
- Luminous Efficacy of >90lm/W
- Surge protection up to 3kV
- \*\* Not suitable for Outdoors





edge of electrical engineering

### LED EDGELIT RECESS PANEL - VA



POWER	LUMEN OUTPUT	CRI	BEAM ANGLE	DIMENSION (mm)			STD PKG
				H	OD	CO	
6W	480 lm	>80	120°	20	85	75	20
9W	720 lm	>80	120°	20	120	105	20
12W	960 lm	>80	120°	20	170	155	20
18W	1440lm	>80	120°	20	225	205	20

\* AVAILABLE IN COLOUR TEMP: 6K, 4K & 3K. AVAILABLE SHAPE: ROUND | SQUARE

**Application:** Home | Office | Retail | Hospitality

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- Color Rendering Index > 80
- IP Rating: IP20
- Aesthetic sleek design, edge lit technology and broad lighting area
- High transmittance anti-glare diffuser for uniform light distribution
- Luminous Efficacy of >80lm/W
- Surge protection up to 3kV
- \*\* Not suitable for Outdoors



edge of electrical engineering

### LED SURFACE DOWNLIGHT PANEL - LARGO



POWER	LUMEN OUTPUT	CRI	BEAM ANGLE	DIMENSION (mm) H   OD	STD PKG
6W	540lm	>80	120°	40   125	20
8W	720lm	>80	120°	40   145	20
12W	1080lm	>80	120°	40   175	20
15W	1350lm	>80	120°	40   175	20
22W	1980lm	>80	120°	40   225	20

\* AVAILABLE IN COLOUR TEMP: 6K, 4K & 3K. AVAILABLE SHAPE: ROUND | SQUARE

**Application:** Home | Office | Staircase | Indoor Parking | Balcony | Hospitality

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- Color Rendering Index > 80
- IP Rating: IP20
- High transmittance anti-glare diffuser for uniform light distribution
- Luminous Efficacy of >90lm/W
- Surge protection up to 3kV
- \*\* Not suitable for Outdoors





edge of electrical engineering

### LED SURFACE DOWNLIGHT PANEL - NITO



POWER	LUMEN OUTPUT	CRI	BEAM ANGLE	DIMENSION (mm) H   OD	STD PKG
8W	800lm	>80	120°	30   90	20
12W	1200lm	>80	120°	30   145	20
15W	1500lm	>80	120°	30   145	20
22W	2200lm	>80	120°	30   180	20

\* AVAILABLE IN COLOUR TEMP: 6K, 4K & 3K. AVAILABLE SHAPE: ROUND | SQUARE

**Application:** Home | Office | Staircase | Indoor Parking | Balcony | Hospitality

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- Color Rendering Index > 80
- IP Rating: IP20
- Aesthetic sleek design edgelit surface panel for broad lighting area
- High transmittance anti-glare diffuser for uniform light distribution
- Luminous Efficacy of >100lm/W
- Surge protection up to 3kV
- \*\* Not suitable for Outdoors



edge of electrical engineering

### LED FOOTLIGHT - RIE



POWER	LUMEN OUTPUT	CRI	BEAM ANGLE	DIMENSION (mm)	CO (mm)	STD PKG
3W	210 lm	>80	45°	35 95 95	67 60	20
6W	420 lm	>80	45°	36 115 85	66 95	20

\*AVAILABLE IN 6K & 3K. AVAILABLE BODY COLOR: WHITE & GREY

Application: Home | Office | Pathway | Hospitality

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- Color Rendering Index > 80
- Suitable for: 3\*3 | 6\*3 boxes
- Luminous Efficacy of >70lm/W
- IP Rating: IP65
- Aesthetic sleek design AL die cast housing with potted driver



edge of electrical engineering

### LED MOTION SENSOR FOOTLIGHT - RIE-SENZO



POWER	LUMEN OUTPUT	CRI	BEAM ANGLE	DIMENSION (mm)	CO (mm)	STD PKG
3W	210 lm	>80	45°	35 95 95	67 60	20
6W	420 lm	>80	45°	36 115 85	66 95	20

\*AVAILABLE IN 6K & 3K. AVAILABLE BODY COLOR: WHITE & GREY

Application: Home | Office | Pathway | Hospitality

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- Color Rendering Index > 80
- Suitable for: 3\*3 | 6\*3 boxes
- Luminous Efficacy of >70lm/W
- IP Rating: IP65
- Aesthetic sleek design AL die cast housing with potted driver
- Powered by Motion Sensor



edge of electrical engineering



### LED BACKLIT FLAT PANEL - FLARE

POWER	LUMEN OUTPUT	CRI	BEAM ANGLE	DIMENSION (mm)			STD PKG
				OD	CO	H	
36W	3240lm	>80	120°	595x595	570X570	65	4
48W	4320lm	>80	120°	595x595	570X570	65	4

\*AVAILABLE IN 6K, 4K & 3K. AVAILABLE MODELS: RECESS | SURFACE

**Application:** Bank | Office | Hospital | Retail | Shops | Kitchen

- Input Voltage: 220-240 AC
  - Power Factor : >0.9
  - Operating Temperature: -20°C to 50°C
  - Frequency: 50-60Hz
  - Color Rendering Index > 80
  - IP Rating: IP20
  - Aesthetic epoxy coated CRCA MS housing backlit flat panel
  - High transmittance anti-glare milky diffuser for uniform light distribution
  - Luminous Efficacy of >90lm/W
  - Surge protection up to 3kV
- \*\* Not suitable for Outdoors



edge of electrical engineering

### LED BACKLIT FLAT PANEL - FLARE



POWER	LUMEN OUTPUT	CRI	BEAM ANGLE	DIMENSION (mm) OD   CO   H			STD PKG
36W	3240lm	>80	120°	595x595	570X570	65	4
48W	4320lm	>80	120°	595x595	570X570	65	4

\*AVAILABLE IN 6K, 4K & 3K. AVAILABLE MODELS: RECESS | SURFACE

**Application:** Bank | Office | Hospital | Retail | Shops | Kitchen

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- Color Rendering Index > 80
- Flat panel with inbuilt motion sensors
- IP Rating: IP20
- Aesthetic epoxy coated CRCA MS housing backlit flat panel
- High transmittance anti-glare milky diffuser for uniform light distribution
- Luminous Efficacy of >90lm/W
- Surge protection up to 3kV
- \*\* Not suitable for Outdoors



edge of electrical engineering

### LED EDGELIT SUPER SLIM FLAT PANEL - FLARE SLIM

POWER	LUMEN OUTPUT	CRI	BEAM ANGLE	DIMENSION (mm) OD CO H	STD PKG
28W (1X2)	2520lm	>80	120°	595 295 65 580X270	4
45W (1X4)	4050lm	>80	120°	1190 295 65 1175X270	4
36W (2X2)	3240lm	>80	120°	595 595 65 580X580	4
45W (2X2)	4240lm	>80	120°	595 595 65 580X580	4

\*AVAILABLE IN 6K, 4K & 3K. AVAILABLE MODEL: RECESS

**Application:** Bank | Office | Hospital | Retail | Shops

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- Color Rendering Index > 80
- Flat panel with inbuilt motion sensors
- IP Rating: IP20
- Aesthetic epoxy coated super slim edge lit flat panel
- High transmittance anti-glare milky diffuser for uniform light distribution
- Luminous Efficacy of>90lm/W
- Surge protection up to 3kV
- \*\* Not suitable for Outdoors



edge of electrical engineering



### LED LINEAR HANGING LIGHT - WOODY

POWER	LUMEN OUTPUT	CRI	Length (mm)	WIDTH (mm)	HEIGHT (mm)	STD PKG
36W	3240 lm	>80	1200	50	40	6
48W	4320 lm	>80	1200	50	40	6

\*AVAILABLE IN 6K, 4K & 3K

Application: Home | Bank | Office | Hospital | Library | Shops

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- Color Rendering Index > 80
- Flat panel with inbuilt motion sensors
- IP Rating: IP20
- Aesthetic architectural box type wooden finish Al housing anti rust design
- High quality diffuser for glare free uniform light distribution
- Luminous Efficacy of >90lm/W
- Surge protection up to 3kV
- \*\* Not suitable for Outdoors



### LED SPOT LIGHT - SHEEN 360

POWER	LUMEN OUTPUT	CRI	BEAM ANGLE	OUTER SIZE (mm)	STD PKG
20W	1800 lm	>80	24°	110 x 95	10
30W	2700 lm	>80	24°	115X 95	10

\*AVAILABLE IN 6K, 4K & 3K. AVAILABLE BODY COLOR: WHITE & BLACK. MOUNTING: SURFACE

Application: Home | Office | Hospitality | Retail

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- Color Rendering Index > 80
- IP Rating: IP20
- Unique 360° movement fixture design
- Suitable for wall mount spot lighting
- Luminous Efficacy of >90lm/W
- Surge protection up to 3kV
- \*\* Not suitable for Outdoors





edge of electrical engineering

### LED SPOT LIGHT - CAMEO



POWER	LUMEN OUTPUT	CRI	BEAM ANGLE	OUTER SIZE (mm)	STD PKG
10W	900 lm	>80	24°	116x70	10
20W	1800 lm	>80	24°	116x90	10
30W	2700 lm	>80	24°	130x90	10

\*AVAILABLE IN 6K, 4K & 3K. AVAILABLE BODY COLOR: WHITE & BLACK. MOUNTING: SURFACE

Application: Home | Office | Hospitality | Retail

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- Color Rendering Index > 80
- IP Rating: IP20
- Unique camera shaped fixture design
- Suitable for wall mount spot lighting
- Luminous Efficacy of >90lm/W
- Surge protection up to 3kV
- \*\* Not suitable for Outdoors



### LED TRACK LIGHT - SHEEN 360-TR

POWER	LUMEN OUTPUT	CRI	BEAM ANGLE	OUTER SIZE (mm)	STD PKG
20W	1800 lm	>80	24°	110 x 95	10
30W	2700 lm	>80	24°	115X 95	10

\*AVAILABLE IN 6K, 4K & 3K. AVAILABLE BODY COLOR: WHITE & BLACK. MOUNTING: TRACK

**Application: Home | Office | Hospitality | Retail**

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- Color Rendering Index > 80
- IP Rating: IP20
- Unique 360° movement fixture design
- Suitable for track mount spot lighting
- Luminous Efficacy of >90lm/W
- Surge protection up to 3kV
- \*\* Not suitable for Outdoors



### LED TRACK LIGHT - CAMEO TR

POWER	LUMEN OUTPUT	CRI	BEAM ANGLE	OUTER SIZE (mm)	STD PKG
10W	900 lm	>80	24°	116x70	10
20W	1800 lm	>80	24°	116x90	10
30W	2700 lm	>80	24°	130x90	10

\*AVAILABLE IN 6K, 4K & 3K. AVAILABLE BODY COLOR: WHITE & BLACK. MOUNTING: TRACK

**Application:** Home | Office | Hospitality | Retail

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- Color Rendering Index > 80
- IP Rating: IP20
- Unique camera shaped fixture design
- Suitable for track mount spot lighting
- Luminous Efficacy of >90lm/W
- Surge protection up to 3kV
- \*\* Not suitable for Outdoors



edge of electrical engineering

### LED FLOOD LIGHT - BOOM LED FLOOD LIGHT - BOOM DELUXE



BOOM



BOOM DELUXE

POWER	LUMEN OUTPUT	CRI	DIMENSION (mm) L   W   H	STD PKG
10W	1000 lm	>70	118   125   42	20
20W	2000 lm	>70	180   180   42	20
30W	3000 lm	>70	225   225   55	10
50W	5000 lm	>70	280   275   60	10
100W	10000 lm	>70	290   285   85	6
150W	15000 lm	>70	315   335   90	4

\*AVAILABLE IN 6K & 3K. AVAILABLE BODY COLOR: WHITE & GREY. ALSO AVAILABLE IN 200W & 400W.

Application: Façade lighting | Parks | Warehouses | Parking | Hoarding | Township

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- Color Rendering Index > 70
- IP Rating: IP66
- Aesthetic sleek design AL die cast housing with potted driver
- High quality toughened glass for uniform light distribution and protection
- Luminous Efficacy of >100lm/W
- Surge protection up to 6kV inbuilt and External SPD - 10kV (On demand)
- Excellent thermal resistance for smooth heat dissipation



edge of electrical engineering

### LED STREET LIGHT - BAT CURVE



POWER	LUMEN OUTPUT	CRI	DIMENSION (mm) L   W   H	STD PKG
30W	3000 lm	>70	308   125   45	4
50W	5000 lm	>70	400   140   45	4
100W	10000 lm	>70	530   185   50	4

\*AVAILABLE IN 6K ONLY

**Application: Main Roads | Streets | Parking | Industrial Area | Service lane**

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- Color Rendering Index > 70
- IP Rating: IP65
- Aesthetic sleek design AL die cast housing with anti rust coating
- High quality Lens model for wider light spread
- Luminous Efficacy of >100lm/W
- Surge protection up to 4kV inbuilt and External SPD - 10kV (On demand)
- Excellent thermal resistance for smooth heat dissipation



edge of electrical engineering

### LED STREET LIGHT - BAT PLANO LED STREET LIGHT - BAT PLANO DELUXE



**BAT PLANO DELUXE**



**BAT PLANO**

POWER	LUMEN OUTPUT	CRI	DIMENSION (mm) L   W   H	STD PKG
15W	1500 lm	>70	300   75   60	4
25W	2500 lm	>70	340   80   70	4
30W	3000 lm	>70	340   80   70	4
45W	4500 lm	>70	340   80   70	4

\*AVAILABLE IN 6K ONLY, 3K ON DEMAND

**Application:** Perimeter Security | Pathways | Mall Parking | Industrial Area | Service lane

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- Color Rendering Index > 70
- IP Rating: IP65
- Aesthetic photometric design AL die cast housing
- Powder coated with phosphochromate treatment
- High quality Lens model for wider light spread
- Luminous Efficacy of >100lm/W
- Surge protection up to 4kV inbuilt and External SPD - 10kV (On demand)



### LED GROUND BURIAL LIGHT - RIAL



POWER	LUMEN OUTPUT	CRI	BEAM ANGLE	STD PKG
3W	210 lm	>80	45°	10
7W	490 lm	>80	45°	10
9W	630 lm	>80	45°	10
12W	840 lm	>80	45°	10

\*AVAILABLE IN 6K & 3K

Application: Pathway | Hotel | Villa | School | Gardens

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- Color Rendering Index > 70
- IP Rating: IP65
- Burial Mounting
- Luminous Efficacy of >70lm/W
- Surge protection up to 3kV
- Excellent thermal resistance for smooth heat dissipation



edge of electrical engineering



### LED SPIKE LIGHT - SPIKY

POWER	LUMEN OUTPUT	CRI	BEAM ANGLE	STD PKG
5W	350 lm	>70	45°	10
9W	630 lm	>70	45°	10
11W	770 lm	>70	45°	10

\*AVAILABLE IN 6K, 3K, RED, BLUE & GREEN

**Application: Lawn | Garden | Villa | Parch | Patio | Outer wall**

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- Color Rendering Index > 70
- IP Rating: IP65
- Aesthetic sleek design AL die cast housing with adjustable movement
- Luminous Efficacy of >70lm/W
- Surge protection up to 3kV
- Corrosion resistant housing





edge of electrical engineering

### LED HIBAY LUMINAIRE - ROCKY



POWER	LUMEN OUTPUT	CRI	DIMENSION (mm)	STD PKG
80W	8800 lm	>80	231   125   231	2
100W	11000 lm	>80	231   125   231	2
120W	13200 lm	>80	231   125   231	2

\*AVAILABLE IN 6K ONLY. AVAILABLE BODY COLOR: WHITE & GREY

**Application: Warehouse | Airport | Indoor Stadium | Manufacturing Units | Industries**

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- Color Rendering Index > 80
- IP Rating: IP65
- Aesthetic sleek design AL die cast housing with toughened glass
- Powder coated with phosphochromate treatment
- High quality Lens model for wider light spread
- Luminous Efficacy of >110lm/W
- Surge protection up to 4kV inbuilt and External SPD - 10kV (On demand)



edge of electrical engineering

### LED WELL GLASS LUMINAIRE - ROCKY-WL



POWER	LUMEN OUTPUT	CRI	DIMENSION (mm) OD   H	STD PKG
45W	4500 lm	>80	185   195	2
80W	8000 lm	>80	210   220	2

\*AVAILABLE IN 6K ONLY


**Application: Warehouse | Manufacturing Units | Rough Industries**

- Input Voltage: 220-240 AC
- Power Factor : >0.9
- Operating Temperature: -20°C to 50°C
- Frequency: 50-60Hz
- Color Rendering Index > 80
- IP Rating: IP65
- Aesthetic sleek design AL die cast housing with toughened glass
- High quality Lens model for wider light spread
- Luminous Efficacy of >100lm/W
- Surge protection up to 4kV inbuilt and External SPD - 10kV (On demand)



edge of electrical engineering

## ON DEMAND

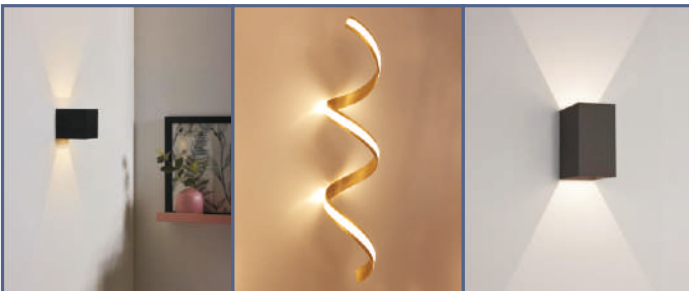

LED WALL LIGHTS



SOLAR STREET LIGHTS



edge of electrical engineering

## ON DEMAND



LED DECORATIVE HANGING LIGHTS



LED PROFILE LIGHTS



CORPORATE OFFICE :

Plot No. 775, Sector-52, Near Artemis Hospital, Wazirabad, Gurugram-122003, India  
Phone : +91 9810085244, Email : [lspowercontrol@hotmail.com](mailto:lspowercontrol@hotmail.com)  
Web.: [www.lspowercontrol.com](http://www.lspowercontrol.com)